


KEMET Part Number: T409B105K020BK
(CWR09JK105KB)

Capacitor, Tantalum, 1 uF, 3813, +/-10% Tol, -55/+125C, 20 VDC (85C), Failure Rate=B (0.1%/1000 Hrs)

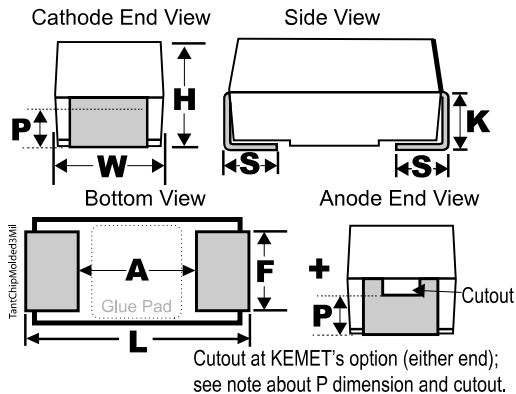

Dimensions (mm)

Symbol	Dimension	Tolerance
L	3.81	+/-0.38
W	1.27	+/-0.38
H	1.27	+/-0.38
K	0.76	MIN
F	1.27	+/-0.13
S	0.76	+0.025/-0.13
P	0.38	MIN
A	2.29	NOM

Notes:

-Note: When Option C Is Selected For Lead Material, Add An Additional 0.38mm To The Tolerances For "L", "W", "H", "K", "F" And "S"

-P And R Dimensions Represents The Minimum Solderable Area Of The Termination Surface Entirely Below Cutout (If One Is Present)

General Information

Supplier:	KEMET
Application:	MIL-PRF-55365/4
Part Type Description:	SMD, MnO2, Molded, Military Equivalent
Construction:	Standard Chip-MnO2
Body Type:	SMD Chip
Termination:	Solder Fused
Footprint:	3813
Weight:	68.73 mg
Approvals:	MIL-PRF-55365/4, CWR09 Style
RoHS:	No

Specifications

Capacitance:	1 uF
Tolerance:	+/-10%
Voltage:	20 VDC (85C)
Voltage:	13.4 VDC (125C)
Temperature Range:	-55/+125C
Testing:	Standard Testing Only
Resistance/ESR:	12 Ohms (100kHz)
Failure Rate:	B (0.1%/1000 Hrs)
Leakage Current:	1 uA
Dissipation Factor:	6%

Packaging Specifications

Package Kind:	T&R
Package Size:	7 in/180 mm
Package Quantity:	2500