


LEAD FINISH: GOLD	
CASING FINISH: GOLD	
CAPACITANCE	1200pF +100%-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	5 AMP MAX.
WORKING VOLTAGE	125°C 200VDC MAX.
D.C. RESISTANCE	.01ohms MAX.

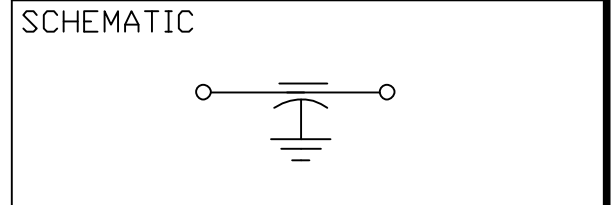

MARKING:
NONE

PACKING:
BAG: SCIF-9925-122
DATE CODE
LOT NO.
QTY./BAG (200 MAX.)

- NOTES:
- SUGGESTED MOUNTING HOLE Ø.132 ±.002
 - MAX. SOLDERING TEMP 245°C FOR 5 SEC MAX



	0	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	FAIRVIEW PENNSYLVANIA SPECTRUM CONTROL INC.		
		CHANGE NOTICE	Fractions ± 1/64		Dwn. KAUFFMAN	Description
			Dec. .xx±			
			Dec. .xxx±.005		Engr J.KRAUS	SCIF-9925-122
			Angles ±0° 30'			

